


Profile

- easy manual setting of baud rate and bus address via rotary switch
- No special tools or programming knowledge required
- easy commissioning
- improves serviceability in operations

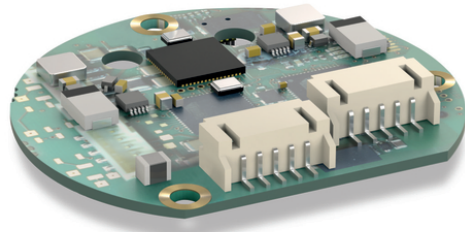

Electrical data

Feature	Technical data	Additional information
Address	1 ... 127	node ID adjustable via 2 rotary switches
Baud rate	20 kBit/s	baud rate adjustable via 1 rotary switch
	50 kBit/s	
	125 kBit/s	
	250 kBit/s	
	500 kBit/s	
	800 kBit/s	
	1 MBit/s	



Accessories:

- Absolute encoder WV5800M
- Absolute encoder WH58MR
- Absolute encoder WV5800M
- Absolute encoder WV58MR

- www.siko-global.com
- www.siko-global.com
- www.siko-global.com
- www.siko-global.com