
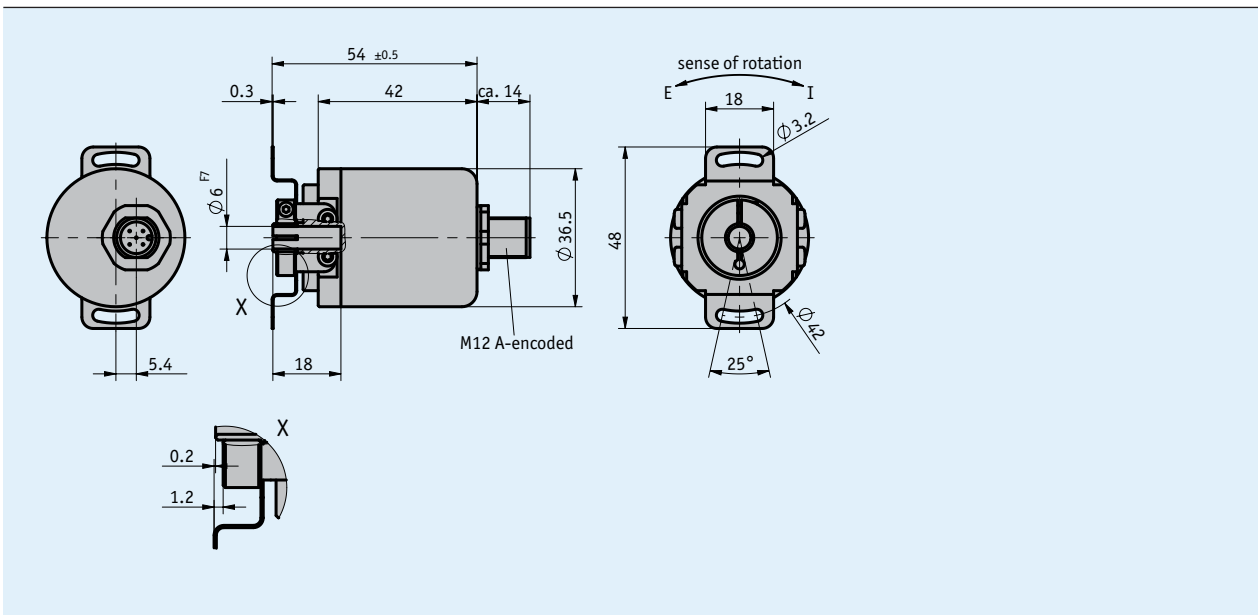


Profile

- Absolute analog encoder
- 13 Bit (8192) resolution over the measuring range
- Operating temperature until -40 °C
- Voltage (0 ... 10 V)/ current (4 ... 20 mA) outputs
- Programmable measuring range via teach-in function with external inputs
- Hollow shaft with $\varnothing 6$ mm



Mechanical data

Feature	Technical data	Additional information
Shaft	stainless steel	
Flange	aluminum	
Housing	coated steel	
Speed	≤12000 rpm	
Moment of inertia	≤20 gcm ²	
Starting torque	≤20 Ncm	at 25 °C
Shaft load rating	axial 20 N radial 80 N	
Weight	~0.15 kg	

Electrical data

■ Transducer, power output

Feature	Technical data	Additional information
Operating voltage	8 ... 32 V DC	4 ... 20 mA
Current consumption	typical 20 mA@ 24 V (idling)	4 ... 20 mA
Linearity	0.15 %	
Load	RL <500 Ω at UB ≥15 V DC	4 ... 20 mA
Accuracy	±0.09°	singleturn
Starting time	<500 ms	
Settling time	32 ms	

■ Transducer, voltage output

Feature	Technical data	Additional information
Operating voltage	8 ... 32 V DC	0 ... 10 V
Current consumption	typical 15 mA	0 ... 10 V
Linearity	0.15 %	
Load	RL >5 kΩ at UB ≥12 V DC	0 ... 10 V
Accuracy	±0.09°	singleturn
Starting time	<500 ms	
Settling time	32 ms	

System data

Feature	Technical data	Additional information
Resolution	13 bit (analog output) 13 bit (singleturn)	over the programmed measuring range
Measuring range	≥11.5° ≤1 revolution(s) ≤65536 revolution(s) 16 revolution(s)	S measuring range (singleturn) M measuring range (multiturn) factory setting, M measuring range (multiturn)

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-40 ... 85 °C	
Storage temperature	-40 ... 85 °C	
Relative humidity	98 %	condensation inadmissible
EMC	EN 61000-6-2 EN 61000-6-4	interference resistance / immission emitted interference / emission
Protection category	IP65	EN 60529
Shock resistance	≤1000 m/s ² , 6 ms	EN 60068-2-27
Vibration resistance	≤100 m/s ² , 10 Hz ... 1 kHz	EN 60068-2-6

Pin assignment

Signal	PIN
I _{out} /U _{out}	1
+UB	2
GND	3
Set 2	4
Set 1	5

Order

Ordering table

Feature	Ordering data	Specification	Additional information
Interface	MWI	4 ... 20 mA	
	MWU	0 ... 10 V	
Measuring range	M	multiturn	
	S	singleturn	≤360° measuring range

Order key

AH36M - - - M12

A
B

Scope of delivery: AH36M

Accessories:
Electronic display MA50

www.siko-global.com