Accessories:

Clamping plate KP04/KP09

Whether you use it for initial installation or retrofitting: the easy and quick mounting of the clamping plates KP04/KP09 between the position indicator and mounting surface helps avoid uncontrolled spindle movements.

Features:

- for shaft diameters 8–20 mm
- selectable position of the clamping lever
- easy mounting and retrofitting

KP04

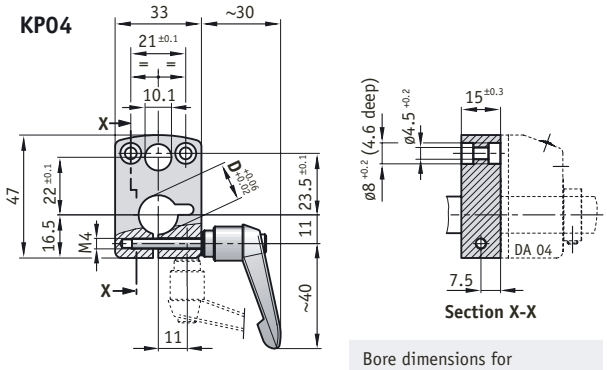

Bore dimensions for torque pin



KP09

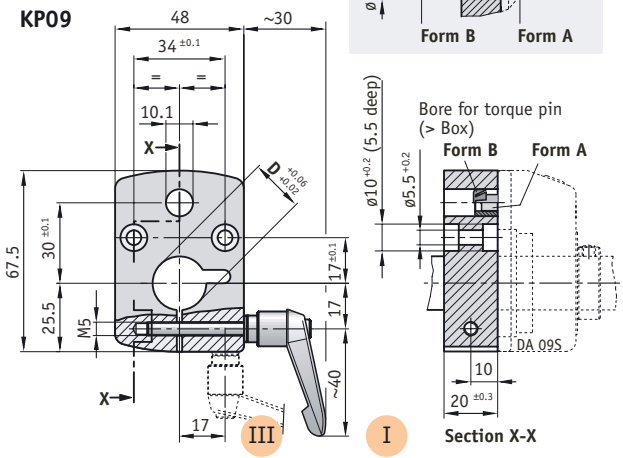

„D“ optionally: 10, 12, 14, 15, 16, 18 or 20 mm

Feature	Ordering data		Technical data	Additional information
Housing			aluminium, anodized	
Clamping lever			plastic, engaging	
Ordering data				
Version	KP09	A		
	KP04			
Bore diameter D	...	B	10, 12, 14, 15, 16, 18, 20	
	...		8, 10, 12, 14, 15	
Locking lever/position	I	C	mounting position I	corresponds to position II by mirroring of I
	III		mounting position III	corresponds to position IV by mrroring of III
Torque pin/form	A	D		
	B			

Your order: KP... – [ ] – [ ] – [ ]
A B C D